



US CONTENT



CANADIAN CONTENT



MANLY MARINE

43676 Progress Way, Chilliwack, BC CANADA V2R 0C3  
28336 Hunter Creek Rd., Gold Beach, OR, 97444, USA  
info@advantecglobal.com | www.advantecglobal.com  
604.607.0091 | Toll Free: 1.800.770.0455

WE ARE PASSIONATE ABOUT DELIVERING  
RELIABLE **SOLUTIONS**  
SUPERIOR **QUALITY**  
WORLD-CLASS **SUPPORT**

# Double Electro-Hydraulic Personnel Door

Model Number:1003

Dual electro-hydraulic sliding personnel door, watertight to 40' head pressure.



\*Custom sizes and pressures available upon request.

RATING: WT

CLEAR OPENING SIZE:

Tolerance  $\pm 1/8$ "

	Min	Max
"A"	31"	47"
"B"	70"	78"

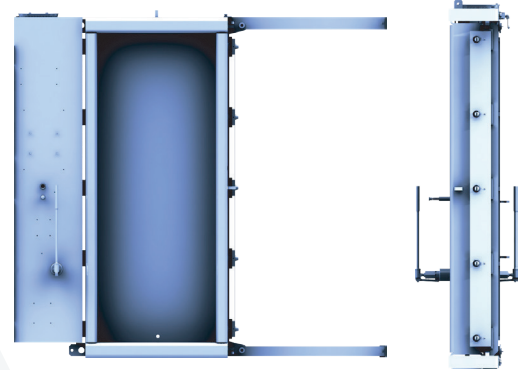

## POWER REQUIREMENTS:

- 460VAC, 60Hz, 30A,  
3 Phase (AVG: 4 kW)

## WEIGHT:

- Approx.: 897 LB.

## MINIMUM CLOSING TIME:

- 40 Sec.

## FRAME FINISH OPTIONS:

- Bare Metal, Mill Finish
- Primer Paint
- Primer Base Coats
- Topcoat
- Powder Coat

## # OF DOG PINS:

- 10

## DOOR MATERIAL:

- Mild Steel
- Aluminum

## FRAME MATERIAL:

- Mild Steel  
(For Steel Door Only)
- Aluminum  
(For Aluminum Door Only)

## GASKET:

- Neoprene

## ACTUATION:

- Dual Hydraulic (3000 PSI  
Test/1000 PSI Operation)

## SAFETY FEATURES:

- Hazard Lights
- Hazard Buzzer

## OPERATION:

- Manual (Hand Crank)
- Electrically Powered
- Locally Operated
- Bridge Controlled

## CLASS OPTIONS:

(Vessel type and size rule set typically reviewed for Class)

- ABS
- DNV-GL
- LR

## AVAILABLE DOCUMENTS:

- Wiring Diagrams
- Hydraulic Schematics
- Installation Manual

Proudly part of the Advantec Marine family of brands



3 YEAR  
HASSLE-FREE  
WARRANTY



ISO CERTIFIED