



US CONTENT



USA SLIDING DOORS

CANADIAN CONTENT



MANLY MARINE

43676 Progress Way, Chilliwack, BC CANADA V2R 0C3
28336 Hunter Creek Rd., Gold Beach, OR, 97444, USA
info@advantecglobal.com | www.advantecglobal.com
604.607.0091 | Toll Free: 1.800.770.0455

WE ARE PASSIONATE ABOUT DELIVERING
RELIABLE **SOLUTIONS**
SUPERIOR **QUALITY**
WORLD-CLASS **SUPPORT**

Single Electro-Hydraulic Personnel Door

Model Number: 1004

Single electro-hydraulic sliding personnel door, watertight to 40' head pressure.


*Custom sizes and pressures available upon request.

RATING: WT

CLEAR OPENING SIZE:

Tolerance $\pm 1/8"$

	Min	Max
"A"	31"	47"
"B"	70"	78"

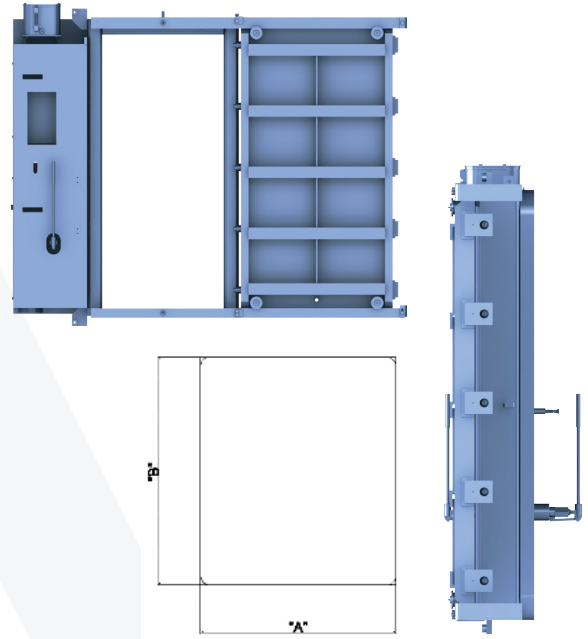

POWER REQUIREMENTS:

- 460VAC, 60Hz, 30A, 3 Phase (AVG: 4 kW)

WEIGHT:

- Approx.: 897 LB.

MINIMUM CLOSING TIME:

- 40 Sec.

FRAME FINISH OPTIONS:

- Bare Metal, Mill Finish
- Primer Paint
- Primer Base Coats
- Topcoat
- Powder Coat

OF DOG PINS:

- 10

DOOR MATERIAL:

- Mild Steel
- Aluminum

FRAME MATERIAL:

- Mild Steel (For Steel Door Only)
- Aluminum (For Aluminum Door Only)

ACTUATION:

- Single Hydraulic Actuator (3000 PSI Test/1000 PSI Operation)

SAFETY FEATURES:

- Hazard Lights
- Hazard Buzzer

GASKET:

- Neoprene

OPERATION:

- Manual (Hand Lever)
- Electrically Powered
- Locally Operated
- Bridge Controlled

CLASS OPTIONS:

(Vessel type and size rule set typically reviewed for Class)

- ABS
- DNV-GL
- LR
- USCG

AVAILABLE DOCUMENTS:

- Wiring Diagrams
- Hydraulic Schematics
- Installation Manual

Proudly part of the Advantec Marine family of brands



3 YEAR
HASSLE-FREE
WARRANTY

PROUDLY MADE IN
NORTH AMERICA

ISO CERTIFIED